


# VX1000

## All-in-One Controller

V1.0.0

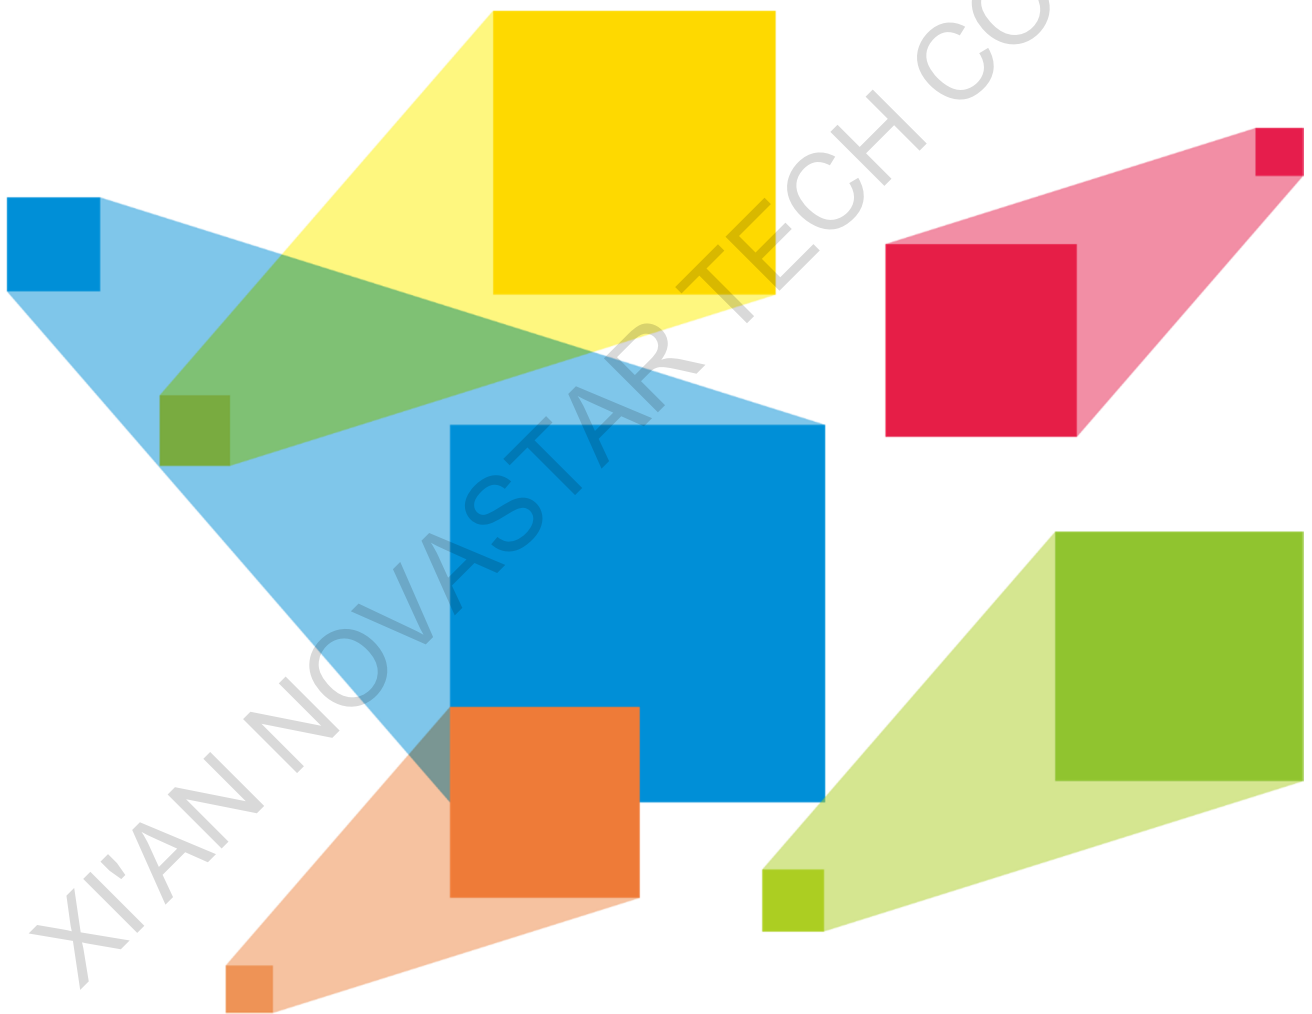

Specifications

## Introduction

The VX1000 is NovaStar's new all-in-one controller that integrates video processing and video control into one box. It features 10 Ethernet ports and supports video controller, fiber converter and Bypass working modes. A VX1000 unit can drive up to 6.5 million pixels, with the maximum output width and height up to 10,240 pixels and 8192 pixels respectively, which is ideal for ultra-wide and ultra-high LED screen applications.

The VX1000 is capable of receiving a variety of video signals and processing high-resolution 4K×1K@60Hz images. In addition, the device features stepless output scaling, low latency, 3D, pixel-level brightness and chroma calibration and more, to present you with an excellent image display experience.

Thanks to its powerful video processing and sending capabilities, the VX1000 can be widely used in applications such as medium and high-end rental, stage control systems and fine-pitch LED screens for project use.

## Features

- Input connectors
  - 1x HDMI 1.4 (IN & LOOP)
  - 1x HDMI 1.4
  - 1x DVI (IN & LOOP)
  - 1x DVI
  - 1x 3G-SDI (IN & LOOP)
  - 1x 10G optical fiber port (OPT1)
- Output connectors
  - 10x Gigabit Ethernet ports
 

A single device unit drives up to 6.5 million pixels, with a maximum width of 10,240 pixels and a maximum height of 8192 pixels.
  - 2x Fiber outputs
 

OPT 1 copies the output on 10 Ethernet ports.

OPT 2 copies or backs up the output on 10 Ethernet ports.
  - 1x HDMI 1.3
 

For monitoring or video output
- Self-adaptive OPT 1 for either video input or sending card output
 

Thanks to the self-adaptive design, OPT 1 can be used as either an input or output connector depending on its connected device.
- Audio input and output
  - Audio input accompanied with HDMI input source
  - Audio output via a multifunction card
  - Output volume adjustment supported
- Low latency
 

Reduce the delay from the input to receiving card to 20 lines when the low latency function and Bypass mode are both enabled.
- 3x layers
  - Adjustable layer size and position
  - Adjustable layer priority
- Output synchronization
 

An internal input source or external Genlock can be used as the sync source to ensure the output images of all cascaded units in sync.
- Powerful video processing
  - Based on SuperView III image quality processing technologies to provide stepless output scaling.
  - One-click full screen display
  - Free input cropping
- Easy preset saving and loading
  - Up to 10 user-defined presets supported
  - Load a preset by simply pressing one button
- Multiple kinds of hot backup
  - Backup between devices
  - Backup between Ethernet ports
  - Backup between input sources
- Mosaic input source supported
 

The mosaic source is composed of several input connectors of the same type.
- Up to 4 units cascaded for image mosaic
- Three working modes
  - Video Controller
  - Fiber Converter
  - Bypass
- All-round color adjustment
 

Input source and LED screen color adjustment supported, including brightness, contrast, saturation, hue and Gamma
- 3D function
 

Work with the EMT200 3D emitter and matched 3D glasses to present 3D visual experience.
- Pixel level brightness and chroma calibration
 

Work with NovaLCT and NovaStar calibration software to support brightness and chroma calibration on each LED, which can effectively remove color discrepancies and greatly improve


LED display brightness and chroma consistency, allowing for better image quality.

Control the device as you wish via V-Can, NovaLCT or device front panel knob and buttons.

- Multiple operation modes

## Appearance

### Front Panel

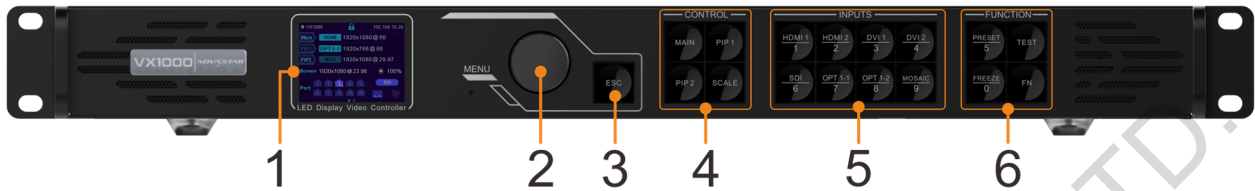


No.	Area	Function
1	LCD screen	Display the device status, menus, submenus and messages.
2	Knob	<ul style="list-style-type: none"> <li>• Rotate the knob to select a menu item or adjust the parameter value.</li> <li>• Press the knob to confirm the setting or operation.</li> </ul>
3	ESC button	Exit the current menu or cancel an operation.
4	Control area	<ul style="list-style-type: none"> <li>• Open or close a layer (main layer and PIP layers), and show the layer status. Status LEDs: <ul style="list-style-type: none"> <li>- On (blue): The layer is opened.</li> <li>- Flashing (blue): The layer is being edited.</li> <li>- On (white): The layer is closed.</li> </ul> </li> <li>• SCALE: A shortcut button for the full screen function. Press the button to make the layer of the lowest priority fill the entire screen. Status LEDs: <ul style="list-style-type: none"> <li>- On (blue): Full screen scaling is turned on.</li> <li>- On (white): Full screen scaling is turned off.</li> </ul> </li> </ul>
5	Input source buttons	<p>Show the input source status and switch the layer input source.</p> <p>Status LEDs:</p> <ul style="list-style-type: none"> <li>• On (blue): An input source is accessed.</li> <li>• Flashing (blue): The input source is not accessed, but used by the layer.</li> <li>• On (white): The input source is not accessed or the input source is abnormal.</li> </ul> <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• When a 4K video source is connected to OPT 1, OPT 1-1 has a signal but OPT 1-2 does not have a signal.</li> <li>• When two 2K video sources are connected to OPT 1, OPT 1-1 and OPT 1-2 both have a 2K signal.</li> </ul>
6	Shortcut function buttons	<ul style="list-style-type: none"> <li>• PRESET: Access the preset settings menu.</li> <li>• TEST: Access the test pattern menu.</li> <li>• Freeze: Freeze the output image.</li> <li>• FN: A customizable button</li> </ul>

**Note:**

Hold down the knob and **ESC** button simultaneously for 3s or longer to lock or unlock the front panel buttons.

## Rear Panel

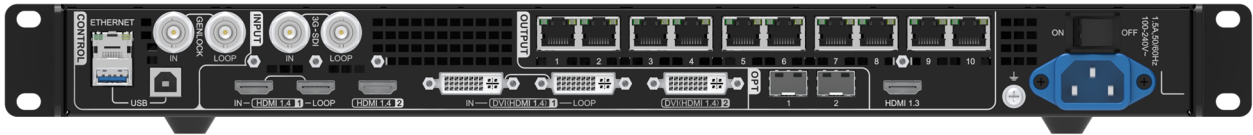


Input Connectors		
Connector	Qty	Description
3G-SDI	1	<ul style="list-style-type: none"> <li>• ST-424 (3G), ST-292 (HD) and ST-259 (SD) standard video inputs supported</li> <li>• Max. input resolution: 1920×1080@60Hz</li> <li>• Deinterlacing processing supported</li> <li>• 3G-SDI loop output supported</li> <li>• DOES NOT support input resolution and bit depth settings.</li> </ul>
HDMI 1.4	2	<ul style="list-style-type: none"> <li>• Max. input resolution: 3840×1080@60Hz or 3840×2160@30Hz</li> <li>• HDCP 1.4 compliant</li> <li>• Interlaced signal inputs supported</li> <li>• Mosaic of two HDMI 1.4 inputs supported</li> <li>• Custom resolutions supported                             <ul style="list-style-type: none"> <li>– Max. width: 4092 pixels (4092×1136@60Hz)</li> <li>– Max. height: 3981 pixels (1060×3981@60Hz)</li> </ul> </li> <li>• Loop output supported on HDMI 1.4 1</li> </ul>
DVI (HDMI 1.4)	1	<ul style="list-style-type: none"> <li>• Max. input resolution: 3840×1080@60Hz or 3840×2160@30Hz</li> <li>• HDCP 1.4 compliant</li> <li>• Interlaced signal inputs supported</li> <li>• Custom resolutions supported                             <ul style="list-style-type: none"> <li>– Max. width: 4092 pixels (4092×1136@60Hz)</li> <li>– Max. height: 3981 pixels (1060×3981@60Hz)</li> </ul> </li> <li>• Mosaic of two DVI inputs supported</li> <li>• Loop output supported on DVI 1</li> </ul>
Output Connectors		
Connector	Qty	Description
Ethernet ports	10	<p>Gigabit Ethernet ports</p> <ul style="list-style-type: none"> <li>• Max. loading capacity: 6.5 million pixels</li> <li>• Max. width: 10,240 pixels</li> <li>• Max. height: 8192 pixels</li> </ul> <p>Ethernet ports 1 and 2 support audio output. When you use a multifunction card to parse the audio, be sure to connect the card to Ethernet port 1 or 2.</p>
HDMI 1.3	1	<ul style="list-style-type: none"> <li>• For output monitoring, the output resolution is fixed to 1920×1080@60Hz.</li> <li>• For video output, the output resolution is adjustable.</li> </ul>
Optical Fiber Ports		
Connector	Qty	Description
OPT	2	10G optical fiber ports

		<ul style="list-style-type: none"> <li>• OPT 1: Self-adaptive, either for video input or for output                             <ul style="list-style-type: none"> <li>– When the device is connected with a fiber converter, the port is used as an output connector.</li> <li>– When the device is connected with a video processor, the port is used as an input connector.</li> <li>– Max. capacity: 1x 4K×1K@60Hz or 2x 2K×1K@60Hz video inputs</li> </ul> </li> <li>• OPT 2: For output only, with copy and backup modes OPT 2 copies or backs up the output on 10 Ethernet ports.</li> </ul>
Control Connectors		
Connector	Qty	Description
ETHERNET	1	Connect to the control PC or router.
USB	2	<ul style="list-style-type: none"> <li>• USB 2.0 (Type-B):                             <ul style="list-style-type: none"> <li>– Connect to the control PC.</li> <li>– Input connector for device cascading</li> </ul> </li> <li>• USB 2.0 (Type-A): Output connector for device cascading</li> </ul>
GENLOCK IN-LOOP	1	Connect to an external sync signal. <ul style="list-style-type: none"> <li>• IN: Accept the sync signal.</li> <li>• LOOP: Loop the sync signal.</li> </ul>



**Note:**

Only the main layer can use the mosaic source. When the main layer uses the mosaic source, PIP 1 and 2 cannot be opened.

# Applications

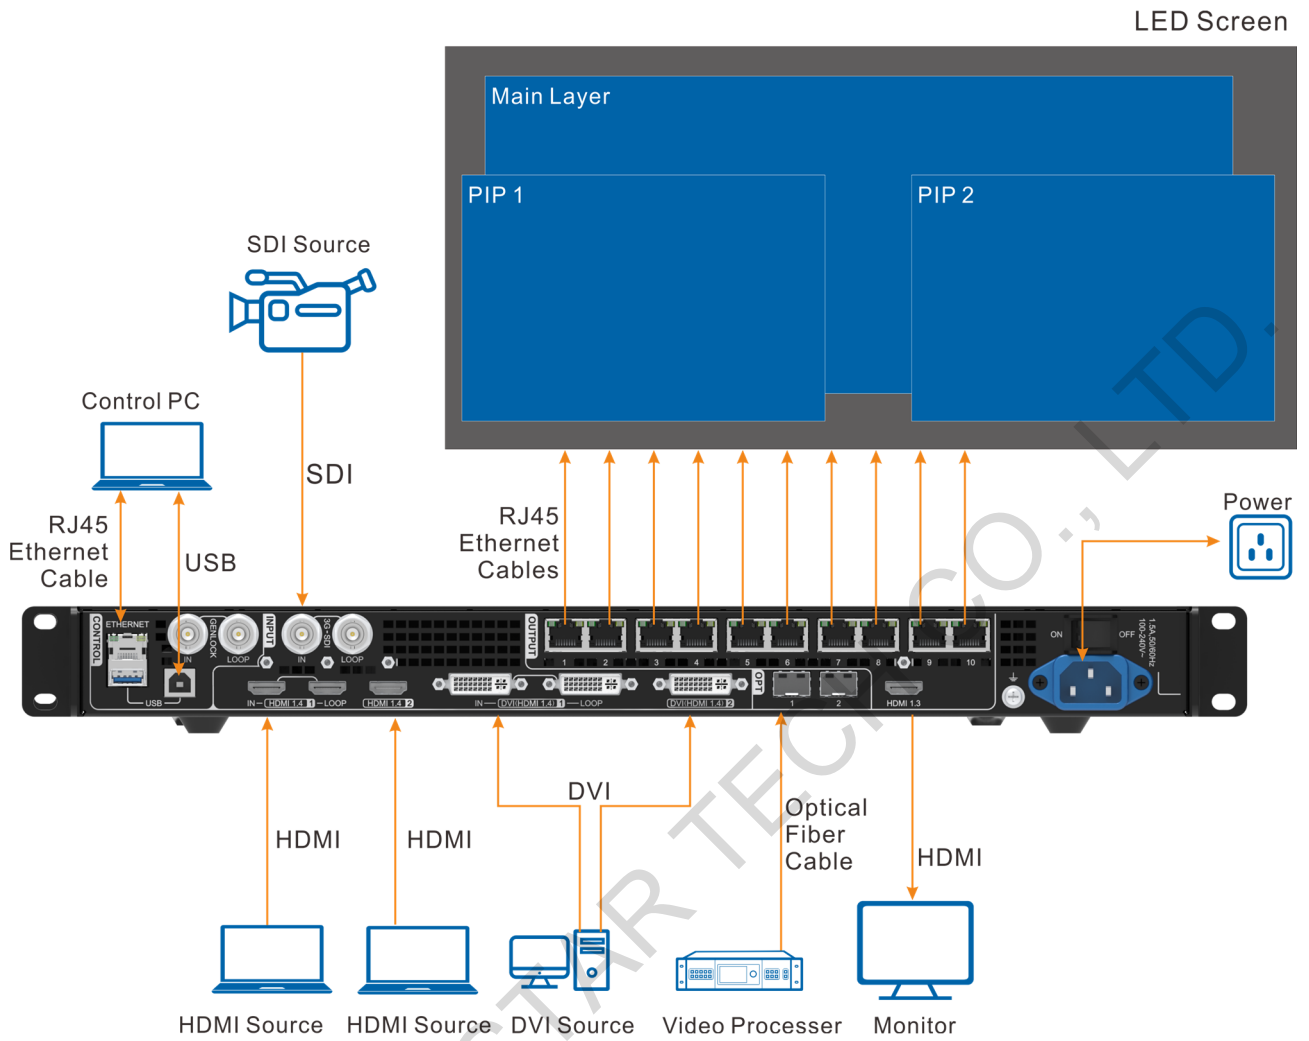

## Dimensions

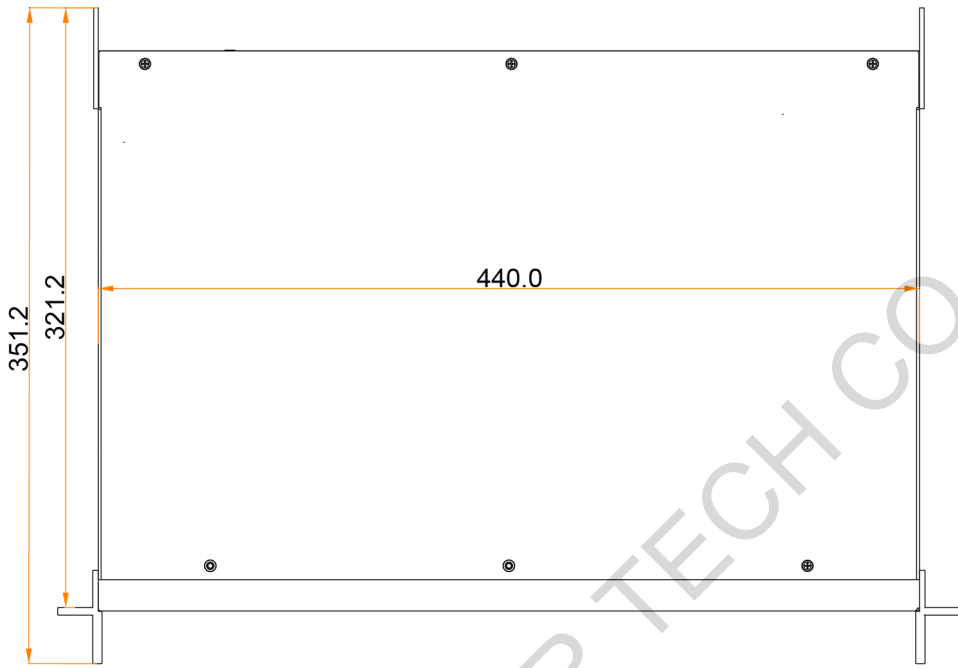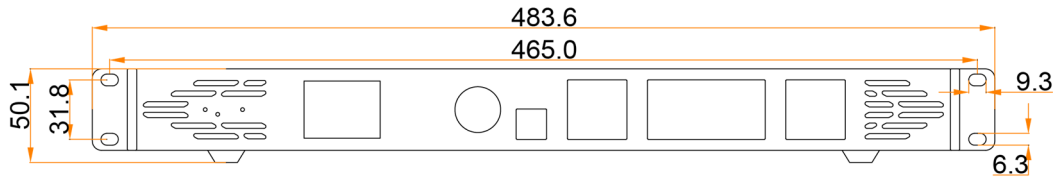

Tolerance:  $\pm 0.3$

Unit: mm

## Specifications

Electrical Parameters	Power Connector	100–240V~, 1.5A, 50/60Hz
	Rated power consumption	28 W
Operating Environment	Temperature	–10°C to +60°C
	Humidity	20% RH to 90% RH, non-condensing
Storage Environment	Temperature	–20°C to +70°C
	Humidity	10% RH to 95% RH, non-condensing
Physical Specifications	Dimensions	483.6 mm × 351.2 mm × 50.1 mm
	Net Weight	4 kg
	Gross weight	6.3 kg
Packing Information	Accessories	1x Power cord 1x Power adapter 1x HDMI to DVI cable 1x USB cable 1x Ethernet cable 1x HDMI cable 1x DAC cable 1x Quick Start Guide 1x Certificate of Approval 1x Customer Letter 1x Safety Manual
	Packing Box	565 mm × 175 mm × 450 mm
Certifications		TBD
Noise Level ( typical at 25°C /77°F)		45 dB (A)



## Video Source Features

Input connectors	Bit Depth	Max. Input Resolution	
<ul style="list-style-type: none"> <li>• HDMI 1.4</li> <li>• DVI (HDMI 1.4)</li> <li>• OPT 1</li> </ul>	8-bit	RGB 4:4:4	3840×1080@60Hz (Standard)
		YCbCr 4:4:4	4092×1136@60Hz (Custom)
		YCbCr 4:2:2	4096×1080@60Hz (Forced)
		YCbCr 4:2:0	Not supported
	10-bit	Not supported	
	12-bit	Not supported	
3G-SDI	<ul style="list-style-type: none"> <li>• Max. input resolution: 1920×1080@60Hz</li> <li>• DOES NOT support input resolution and bit depth settings.</li> <li>• Supports ST-424 (3G), ST-292 (HD) and ST-259 (SD) standard video inputs.</li> </ul>		

**Copyright © 2021 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.**

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

#### **Trademark**

**NOVA STAR** is a trademark of Xi'an NovaStar Tech Co., Ltd.

#### **Statement**

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

[Official website](http://www.novastar.tech)  
www.novastar.tech

[Technical support](mailto:support@novastar.tech)  
support@novastar.tech