



ALUVISION 2.5MM MODULAR

Specification Sheet

KEY FEATURES



Quick, easy and tool-less installation



Rigging simplified with surface mounted support




Endless possibilities of assembly, including concave mounting



Perfect application for trade shows with its fully modular building system

OVERVIEW

Experience visual excellence with the Aluvision 2.5mm Modular LED Display. Boasting a slim design, vibrant colors, and easy installation, this display system transforms any space with stunning clarity and versatility. Elevate your presentations, advertisements, and brand experiences with this cutting-edge solution.

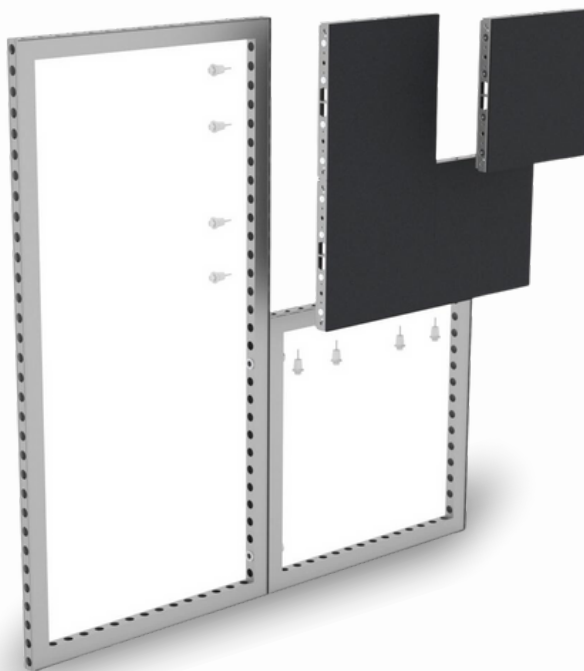

SPECIFICATIONS

Pixel Pitch	2.58 mm	Brightness	1000 nits
Pixel Density	213,920 px/ft ²	Cabinet Dimensions	19.53" x 19.53" x 2.17"
Sending Box	Nova 300, 660, 660 pro	Certification	CE/TUV/EMC/LVD/RoHS/ETL/FCC
Consumption	2.5: 50/152,5 W/tile	Operating System	Windows 2000/ XP/Vista/10
Viewing Angle	140°/120° (H/V)	Grayscale	14 Bit
Module Resolution	192 x 192 px	Viewing Distance	≥ 8.20'
Power Box	Nova A8S	Cabinet Weight	21.66 lb
Contrast Ratio	7000:1	Refresh Rate	3840 Hz

* Max amount of tiles to be connected to one sending box: Nova 300 has 2 data ports and controls up to 34 tiles (2.5). Nova 660 has 4 data ports, controls up to 61 tiles (2.5) and allows easy adjustment of most basic functions. Nova 660 is advised for rental use