




iPoster

		Indoor series	
MODEL		P 2.5	P 1.9
LAMP	LED Type	SMD(2020)	SMD(1010)
	Pixel pitch	2.5mm	1.944mm
MODULE	LED module size	210×280mm	210×280mm
	Resolution(H×W)	84×112	108×144
	LED driving method	1/28 dynamic scan	1/27 dynamic scan
	LED module layout(H×W)	9×2	9×2
CABINET	Resolution(H×W)	756×224	972×288
	Display area	1.06m²	1.06m²
	Cabinet size	1902×572×35mm	1902×572×35mm
	Net. weight/set	32kg	32kg
	Ingress Protection	Front IP40/Rear IP40	Front IP40/Rear IP40
	Power	AC 240/100±10%	AC 240/100±10%
	Serviceability	Front service	Front service
	Max.Power consumption	500W	650W
DISPLAY	Avg.Power consumption	150W	195W
	Viewing Angle(H/V)	160°/160°	160°/160°
	Brightness	800cd/m²	800cd/m²
	Pixel density(pixel/cabinet)	169,344	279,936
	Contrast ratio	4,000:1	4,000:1
	Temperature/ Humidity (Operation/Storage)	-10°C to +40°C; 10% to 90%	-10°C to +40°C; 10% to 90%
	Lifetime[50% brightness]	80,000hours	80,000hours
	Processing	16bit	16bit
	Colors	281trillion	281trillion
	Refresh rate	≥2880Hz	≥2880Hz
	Frame rate	60fps	60fps
	Brightness level	Manually/Auto/Programmable	Manually/Auto/Programmable

Reserve the right to change the specifications without prior notice.

i Poster

ALL NEW DIGITAL POSTER
Indoor series: P2.5/P1.9

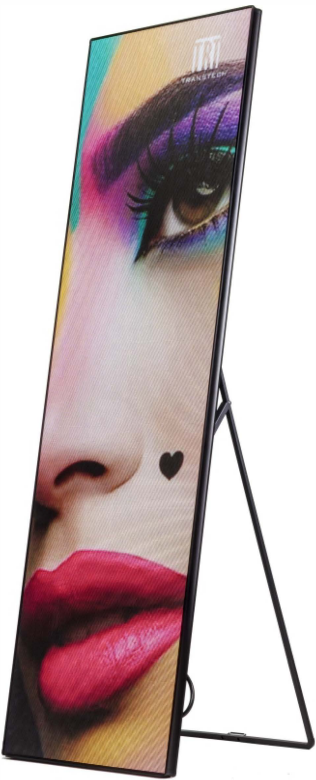

- Thickness: 35mm
- 5mm ultra slim edge design
- Whole front maintenance
- Aluminum integrated frame
- Hidden auto-closing inclined blacket
- Frame size: 572 x 1902mm
- Display size: 560 x 1890mm
- Module size: 280 x 210mm
- Pixel pitch: 2.5mm, 1.9mm
- Display mode: synchronized / asynchronous system
- Signal output: Network cable(RJ45)
- Cross-platform operation: Windows/IOS/Android
- Control pattern: network/WIFI/3G/USB
- Brightness: P2.5(800nit); P1.9(800nit)
- Super light design, weight: 32kg/set



HD image quality


- 2.5mm/1.9mm HD image quality
- Refresh rate up to 3840Hz
- Brightness at 800nits, 3 times brighter than LCD display
- 160° view angle
- High color reproduction
- Compared with indoor LCD poster, with high brightness, super thin & low-power consumption, iposter is also suitable for bright occasion

synchronized / asynchronous system Plug and play, Cross-platform operation

- Free play at anytime, anywhere
- Real time play by connecting to network
- The screen can be controlled with fixed or portable Windows, IOS & Android devices
- The content can be refreshed and stored in built-in media player through WIFI or USB to achieve asynchronous play

Networking integrated management

- Play the video by connecting to HDMI, USB or cable
- Multi-screen cascade, unified playing and management
- After networking, it can push notification and control displays worldwide



Stand-alone mode




Multi-screen cascade



Mirror mode



Multi-screen mode

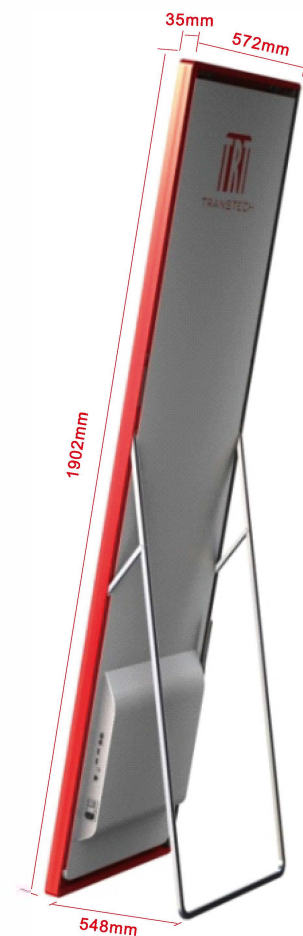

Multi-installation

- Suitable for lifting, wall-mounted, floor-standing and creative installation like inclined strut installation




Floor-standing



lifting



Tilted installation



Creative tilted installation

Multi-application

Applied in shopping mall, meeting room, control center, airport, station, super market, canteen and restaurant. Can be used as:

- Advertising platform
- Shopping guide information, supporting service information release
- Urgent information, instant message release
- Publicity platform, brand model window



Multi screen assembly 16:9

Package & delivery

- Oxford cloth and reflective tape:
Applicable in small amount displays and short distance delivery
- Wooden case:
Applicable in fixed installation and long or short distance delivery
- Flight case:
Applicable for rental display and long or short distance delivery

