

ROE VANISH V8T - 8.9MM

Specification Sheet

KEY FEATURES



Ultra-lightweight carbon




Refresh Rate: 3840Hz



Half panel option

OVERVIEW

Embark on an unparalleled outdoor visual journey with the ROE Vanish 8T LED Panel, offering high brightness, exceptional viewing angles, superior display quality, and unmatched resilience. This panel guarantees captivating visuals from day to night, engaging audiences with immersive experiences in any outdoor setting. Explore our client work to witness its performance.

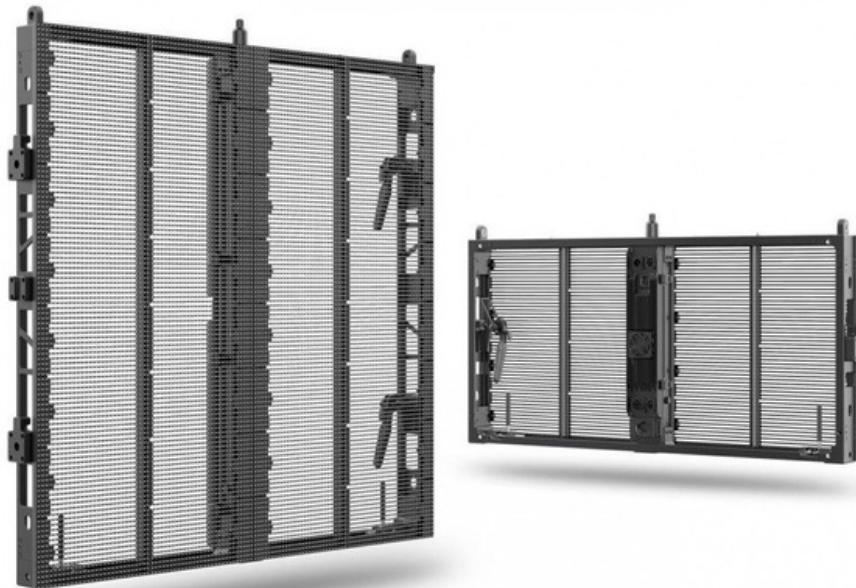

SPECIFICATIONS

| | | | |
|---------------------------------|---|-----------------------------|---|
| Pixel pitch | 8.9mm | LED Configuration | SMD 1515 White |
| Brightness | 4000nits | Viewing Angle Horizontal | 160° |
| Panel dimensions (W×H×T) | 1000mm x 1000mm x 95mm 39.4" x 39.47" x 3.74" | Viewing Angle Vertical | 140° |
| Panel Resolution (H x V) | 112 x 112 | Scan Ratio | 1/4 |
| Panel Weight | 18kg; 39.68lbs | Refresh Rate | 3840Hz |
| Power Consumption Max / Average | 480W / 240W | Gray Scale | 14bit |
| BTU Max / Average | 1640 / 750 | Frame Material | Aluminum alloy |
| Transparency | 50% | Processing Platform | Brompton / MVR / Evision |
| Serviceability | Rear | Operational Temp / Humidity | -20°~45°C, 10~90%RH -4°~113°F, 10~90%RH |
| Curving (Concave & Convex) | Concave 10°~Convex 10°(option) | Storage Temp / Humidity | -40°~60°C, 10~90%RH -40°~140°F, 10~90%RH |
| Max. Hanging (panels) | 22 | IP Rating | Outdoor |
| Max. Stacking (panels) | 6 | | |

*Notes: The specifications are for reference, actual values may vary.