




ALUVISION CONVEX CURVED 2.5MM MODUAR LED PANEL

Specification Sheet

KEY FEATURES

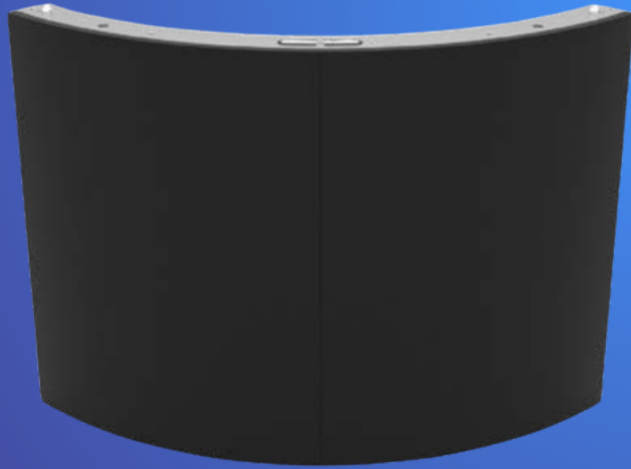

Novastar Processing



Modular Design



90 Degree Curve



BeMatrix Frame Compatible

OVERVIEW

The 2.5mm Aluvision Convex Curved LED tile enables true, seamless convex curved surfaces within the Aluvision modular framework. The tile is purpose-built for curved signage, archways, tunnels and standalone curved walls, providing a smooth continuous curve without faceting while remaining fully compatible with Aluvision flat, floor and corner modules.



SPECIFICATIONS

Pixel Pitch	2.5mm
Panel Dimension	774mm x 496mm x 55mm
Panel Resolution	300 x 192
Max Brightness Calibrated	1000nits
LED Configuration	3 in 1 SMD
Weight Per Panel	12 kg / 26.46 lbs
Processing	Novastar
Transparency	Solid
IP Rating	Indoor
Viewing Distance	2.5m
Refresh Rate	3840Hz
Degree of Curve	90

*Notes: The specifications are for reference, actual values may vary.