


X POSTER ULTRA

Portable LED. Built to scale.

A versatile P1.8mm LED poster that deploys in seconds, folds down for easy transport, and delivers a striking full-height digital display.

Use it as a standalone poster or combine up to six units to create a large-format Full HD 16:9 canvas.

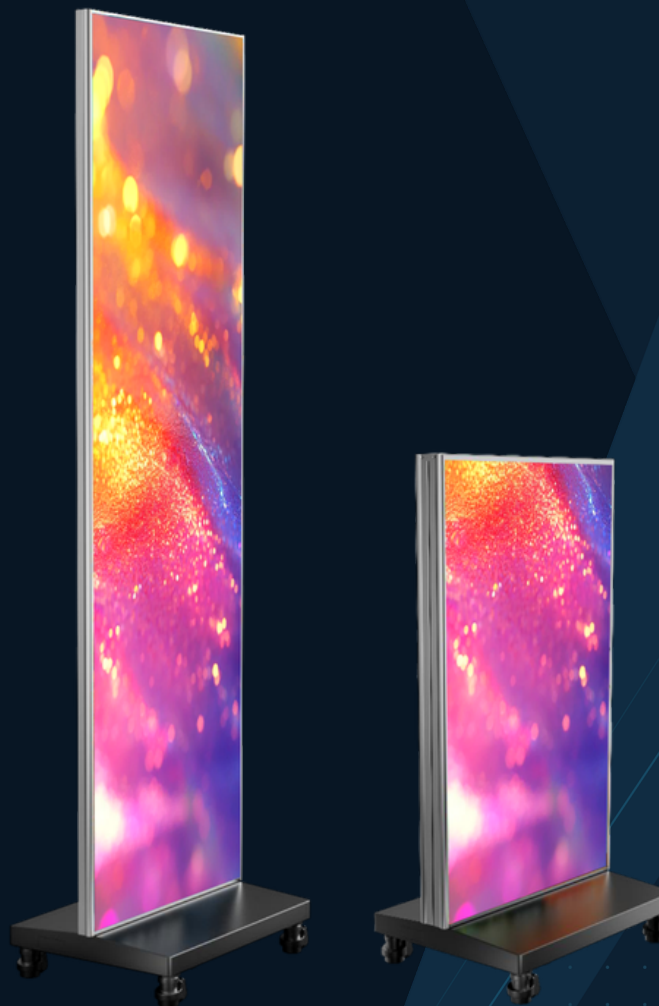

P1.8mm • Foldable • Modular • Scalable

Tall on show. Compact in transit.


Designed to withstand the demand of live events



UNFOLDED

FOLDED

FLIGHT CASE

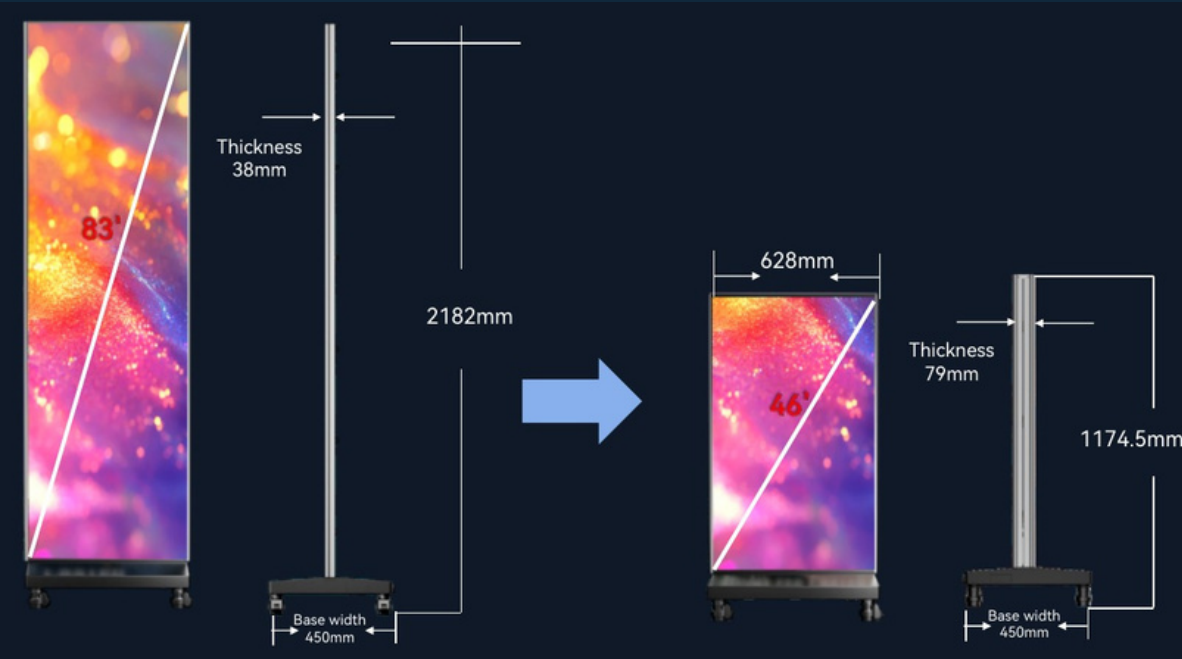

83 in / 46 in

UNFOLDED / FOLDED SCREEN

38 mm / 79 mm

UNFOLDED / FOLDED BODY

110lb

NET WEIGHT PER POSTER

One poster. A wider canvas.

Use a standalone portrait display or join up to six posters for a continuous image.



Six Poster Configuration

1920×1080 Resolution



320 px

320 px

320 px

320 px

320 px

320 px

Full HD, 16:9

Six unfolded posters at 320 × 1080 pixels each can form a 1920 × 1080 content canvas.

Sync / async playback

Supports synchronous and asynchronous playback modes.

Flexible content delivery

HDMI, USB, LAN / Wi-Fi, app and cloud playback are shown in the manufacturer brochure.


Create a large-format LED canvas in minutes. Six X Poster Ultra displays combine to create an impressive 12' 4" wide × 6' 11" tall video wall with a full 1920 × 1080 content canvas. The modular design allows for fast deployment with minimal infrastructure, making it ideal for events, exhibits, activations, and other applications where speed and flexibility matter.

Connections, controls and content.


Versatile connections & playback options



NOVASTAR INTEGRATED SYSTEM

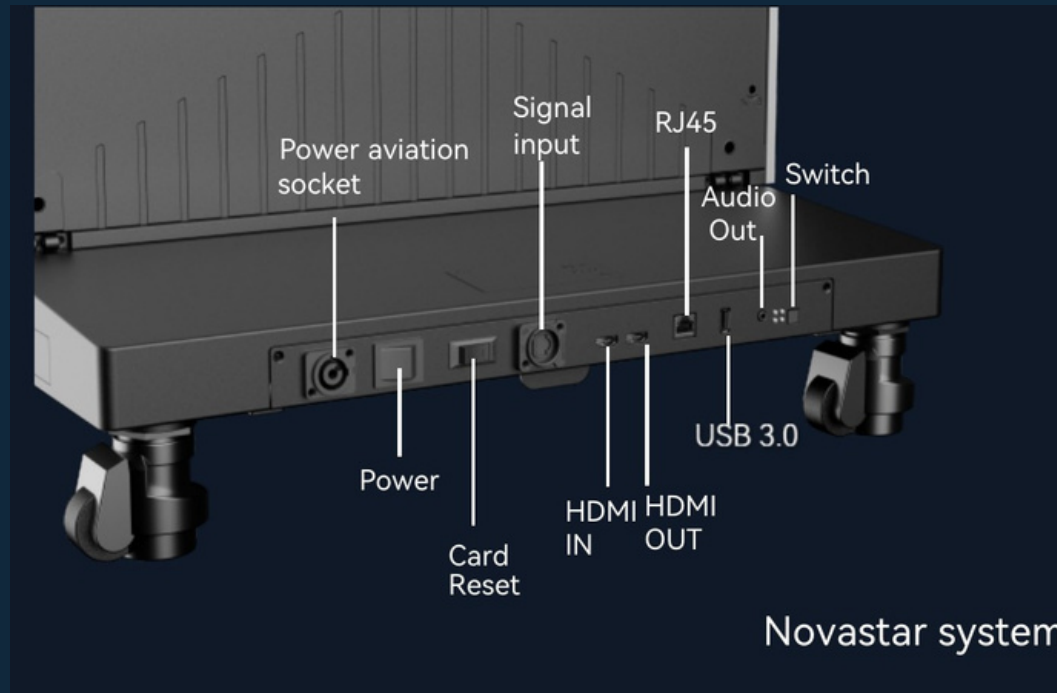


PLAYBACK OPTIONS

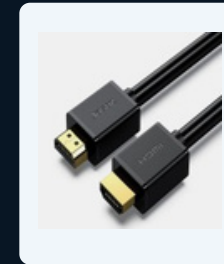


HDMI



USB



APP

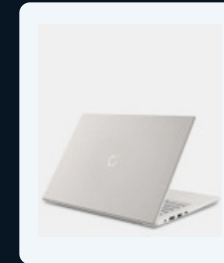

LAN / Wi-Fi



REMOTE CONTROL



CLUSTER CLOUD

REMOTE & LOCAL CONTROL

Multiple ways to connect, control, and deliver content give you the flexibility to choose the playback workflow that best fits your application.

Specifications at a glance.

Manufacturer specifications for the XPoster Ultra Series



DISPLAY & MECHANICAL

Model / pitch class	P1.8
Resolution, unfolded	320 × 1080 pixels
Resolution, folded	320 × 540 pixels
Screen size / active area	83in / 600 × 2025 mm
Module size (W × H)	300 × 168.75 mm
Brightness / contrast	0-600 cd/m² / 4000:1
Gray scale / refresh	14 bit / 3840 or 7680 Hz¹
Viewing angle	160° H / 140° V
Overall, unfolded ²	628 × 2182 × 450 mm
Overall, folded ²	628 × 1174.5 × 450 mm
Net weight	110lb

POWER, I/O & ENVIRONMENT

Input voltage	100-240 V AC, 50/60 Hz
Power per poster	230 W avg. / 690 W max.
Video interfaces	HDMI IN; USB 3.0 × 1; RJ45 × 1
Audio interface	External audio × 1
Control interfaces	RJ45 × 1; USB-B; Wi-Fi; IR control
Storage temperature	-20 to 50°C
Operating temperature ³	0 to 40°C
Operating humidity ³	10-65% RH
Stated service life	≥100,000 hours
Listed certifications ¹	UL / CE / ETL / FCC / RoHS