


RA SERIES

Compatible with 55/62mm frame system
Exhibition LED 496x496mm


Flexible Tile

concave, convex

$\pm 22.5^\circ$

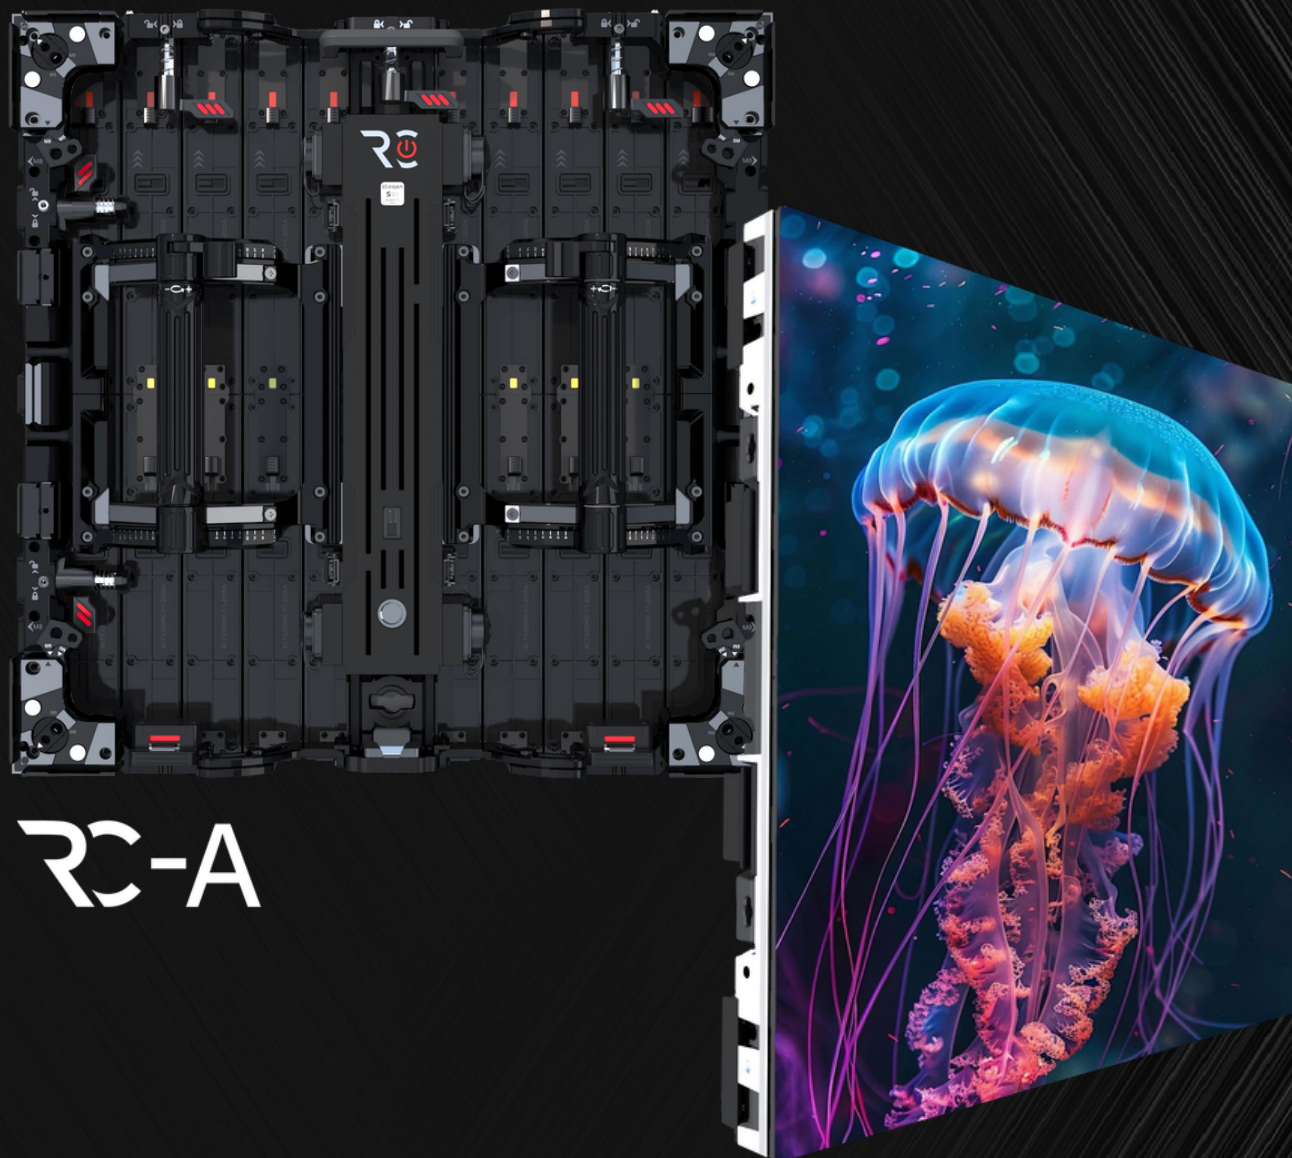

RC-A

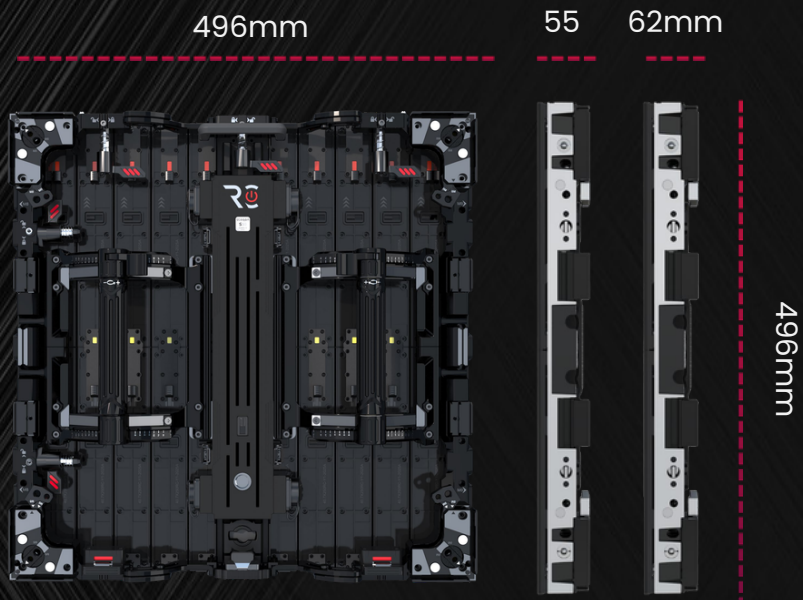


RA SERIES

- 55/62mm Frame compatible
- S-lock optional for safety maintenance
- Front / Rear Maintenance
- Diecasting aluminum
- Cover Plate
- Tray Extension

EXHIBITION


INDOOR SPECIFICATION

PITCH	P1.55
SERIES	RA155i
SMD MODE (cd/m ²)	>800
DISTANCE	>1.55m
PROTECTION	X-GOB
LED KIND	SMD1010
PIXEL DENSITY (dots/m ²)	416,025
REFRESH RATE	1920Hz-3840Hz
VIEWING ANGLE	160°(H) 160°(V)
CONTRAST	6000:1
MODULE SIZE	248 x 248 mm
CABINET SIZE	496 x 496 x 55 mm / 62 mm (19.5" x 19.5" x 2.2" / 2.4")
CABINET RES (px)	320 x 320
SYSTEM	Stacking / Hanging / Stitching
DRIVE MODE (Scan)	1/16 , 1/40
ENVIRONMENT	IP30
MAX POWER (w/m ²)	(CCT) 600
VOLTAGE	AC 100-240V
WEIGHT	9.3kg/Panel(No extensions)
CERTIFICATION	CE, EMC, TUV-EMC, FCC, ETL, PSE, CCC, RoHS

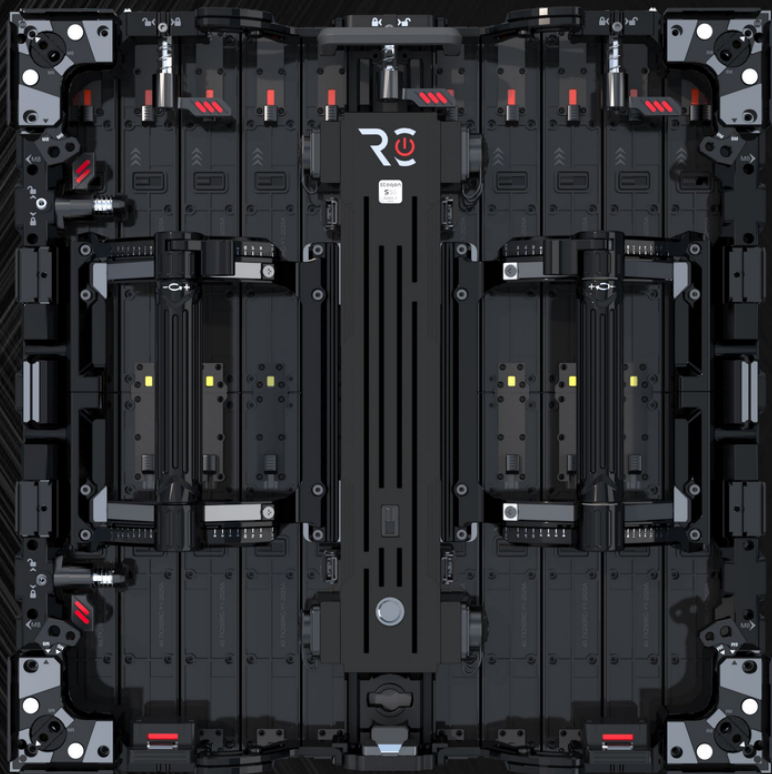

RC-A

Flexible

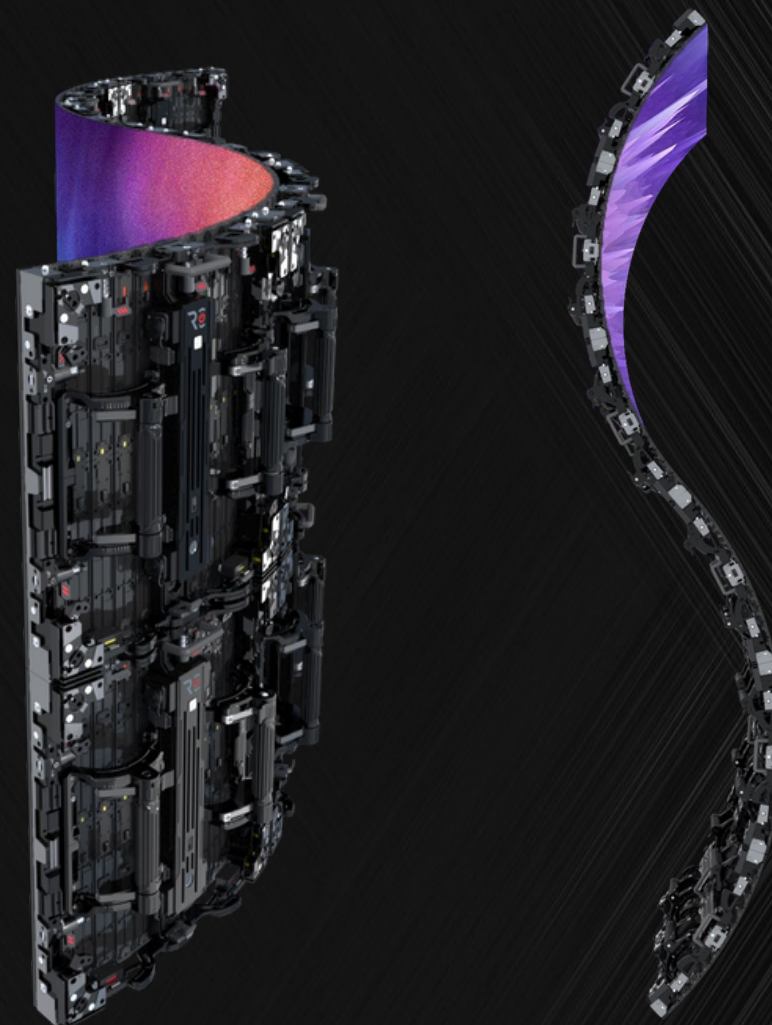

Its flexibility supports S-shaped, concave, convex, and $\pm 22.5^\circ$ arcs, ensuring versatile configurations.

